


NOTE: 5

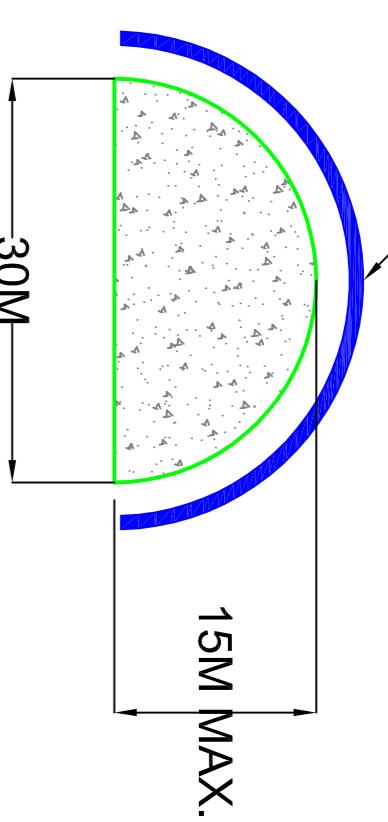

TYP SECTION

NOTES

1. DSG to the stockpiled as per engineers setting out
2. DSG to be built in Layers as per SHW Series 600
3. DSG to be damped-down in dry weather to limit dust & to aid "Crust" Formation
4. Once design height and formation built the stock pile shall be covered using whether proof sheeting
5. Weather proof sheeting shall be Geo Multi-Cover Pull Mats (type 32) or similar

KEY:
 PLANNING APPLICATION BOUNDARY

REV5				FOR EXPLANATION OF DIMS, TOL, NOTES ETC. - SEE B.S.308	SCALE: 1:1	DATE	21.10.11
REV4				UNLESS OTHERWISE STATED DIMENSIONS IN MILLIMETRES (mm) SURFACE TEXTURE VALUE IN (m) MACHINE WHERE MARKED REMOVE SHARP EDGES STRUCTURAL STEELWORK MACHINED ITEMS	DRAWN: GJG	DATE	21.10.11
REV3					CHECKED: JBG	DATE	21.10.11
REV2					APPROVED: TS	DATE	21.10.11
REV1	PLANNING APPLICATION BDY REDEFINED	21.10.11	JBG		RISK ASSESSMENT:		
REV	ALTERATIONS	DATE	SIGNED		COPYRIGHT RESERVED BPB BRITISH GYPSUM LTD		
					PRODUCTION: FIRST ANGLE		
					CAD		
					LOCATION: ROBERTSBRIDGE	DRG No.	4858/006
						A2	

British Gypsum
 MOUNTFIELD, ROBERTSBRIDGE
 EAST SUSSEX, TN32 5LA
 PHONE: (01580) 880234
 FAX: (01580) 880046

