

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION
In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following:

CONSTRUCTION
Likelihood of fly-tipped hazardous substances
Existing overhead and underground high voltage cables

MAINTENANCE / CLEANING
Same as for construction

DECOMMISSIONING / DEMOLITION
Same as for construction

FOR CONTINUATION, SEE DRAWING NO. 0006

NOTES
1. All dimensions in metres unless otherwise stated.
2. For complete fencing key, refer to fencing drawings.

KEY
High Forest - Dry (Planting at 2m centres, random mix in groups of 3-5 of each species) (LE2.1 and LE2.4.1)

High Forest - Dry (Planting at 2.5m centres, random mix in groups of 3-5 of each species) (LE2.1 and LE2.4.1)

High Forest - Wet (Planting at 2m centres, random mix in groups of 3-5 of each species) (LE2.1 and LE2.4.1)

High Forest - Wet (Planting at 2.5m centres, random mix in groups of 3-5 of each species) (LE2.1 and LE2.4.1)

Dry Woodland Edge (3m wide, planting at approximately 1.2 - 1.5m centres in three staggered rows, random mix of 3-5 species (LE2.1 and LE2.4.1) Care must be taken not to plant in obvious or straight lines. Refer to plant spacing detail on drawing B1297000/3000.01a/0001

Wet Woodland Edge (3m wide, planting at approximately 1.2 - 1.5m centres in three staggered rows, random mix of 3-5 species (LE2.1 and LE2.4.1) Care must be taken not to plant in obvious or straight lines. Refer to plant spacing detail on drawing B1297000/3000.01a/0001

Scrub random mix in groups of 3 - 5 of each species (LE2.8)

Wetland Scrub random mix in groups of 3 - 5 of each species (LE2.8)

Existing Woodland to be managed (LE2.1.1)

Existing Woodland Edge to be Managed (LE2.2)

Scattered Trees in Wet Grassland, Marsh and Fen (LE6.4.1.1) Refer to plant spacing detail on drawing B1297000/3000.01a/0001

Scattered Scrub in Neutral Grassland (LE6.1.3.1) Refer to plant spacing detail on drawing B1297000/3000.01a/0001

Climbing plants on fences and structures - 4m linear spacing unless otherwise noted.

Woodland/woodland edge infill planting

Amenity Tree and Shrub Planting (LE3.1)

Extra heavy standard, semi-mature tree or multi-stem tree

Site of Special Scientific Interest (SSSI)

Site of Nature Conservation Importance (SNCI)

Native Species Hedgerow (LE4.3) Two staggered rows, planted at 0.5m centres, 0.5m between rows

Native Hedgerows with Trees (LE4.4) Two staggered rows, planted at 0.5m centres, 0.5m between rows. Trees shall be planted between rows at an average of 10m - 15m centres

Ditch

Watercourse

Pond

Public Footpath

Byway

Bridleway

Existing trees, hedges & scrub to be retained

Woodland management zones

BF - BF 1.8m fence

CB - CB 1.8m close boarded fence

BP - BP 1.2m high timber post and wire fence with badger proofing (HCD/H13 + H46).

P&R - Timber post and four rail fence (HCD/H3)

ABNB - 1.8m high absorptive noise barrier

REH1 - 1.8m high reflective Noise Barrier

REH2 - 1.5m high reflective Noise Barrier

Table with 5 columns: Rev, Rev. Date, Purpose of revision, Drawn, Checked, Rev'd, Appr'd

JACOBS
Simpson House, 6 Cherry Orchard Road, Croyston, Surrey, CR9 6BE
Tel: +44(0)208 686 8212 Fax: +44(0) 208 681 2499
www.jacobs.com

Client: HOCHTIEF, TAYLOR WOODROW, BENTLEY

Project: BEXHILL TO HASTINGS LINK ROAD

Drawing title: PLANTING SHEET 5 OF 14


Drawing status: FOR CONSTRUCTION

Scale: 1:1000 @ A1 DO NOT SCALE

Jacobs No. B1297000

Drawing number: B1297000-PH2/3000.01a/0005 Rev C3

This drawing is not to be used in whole or part other than for the intended purpose and project as defined on this drawing. Refer to the contract for full terms and conditions.

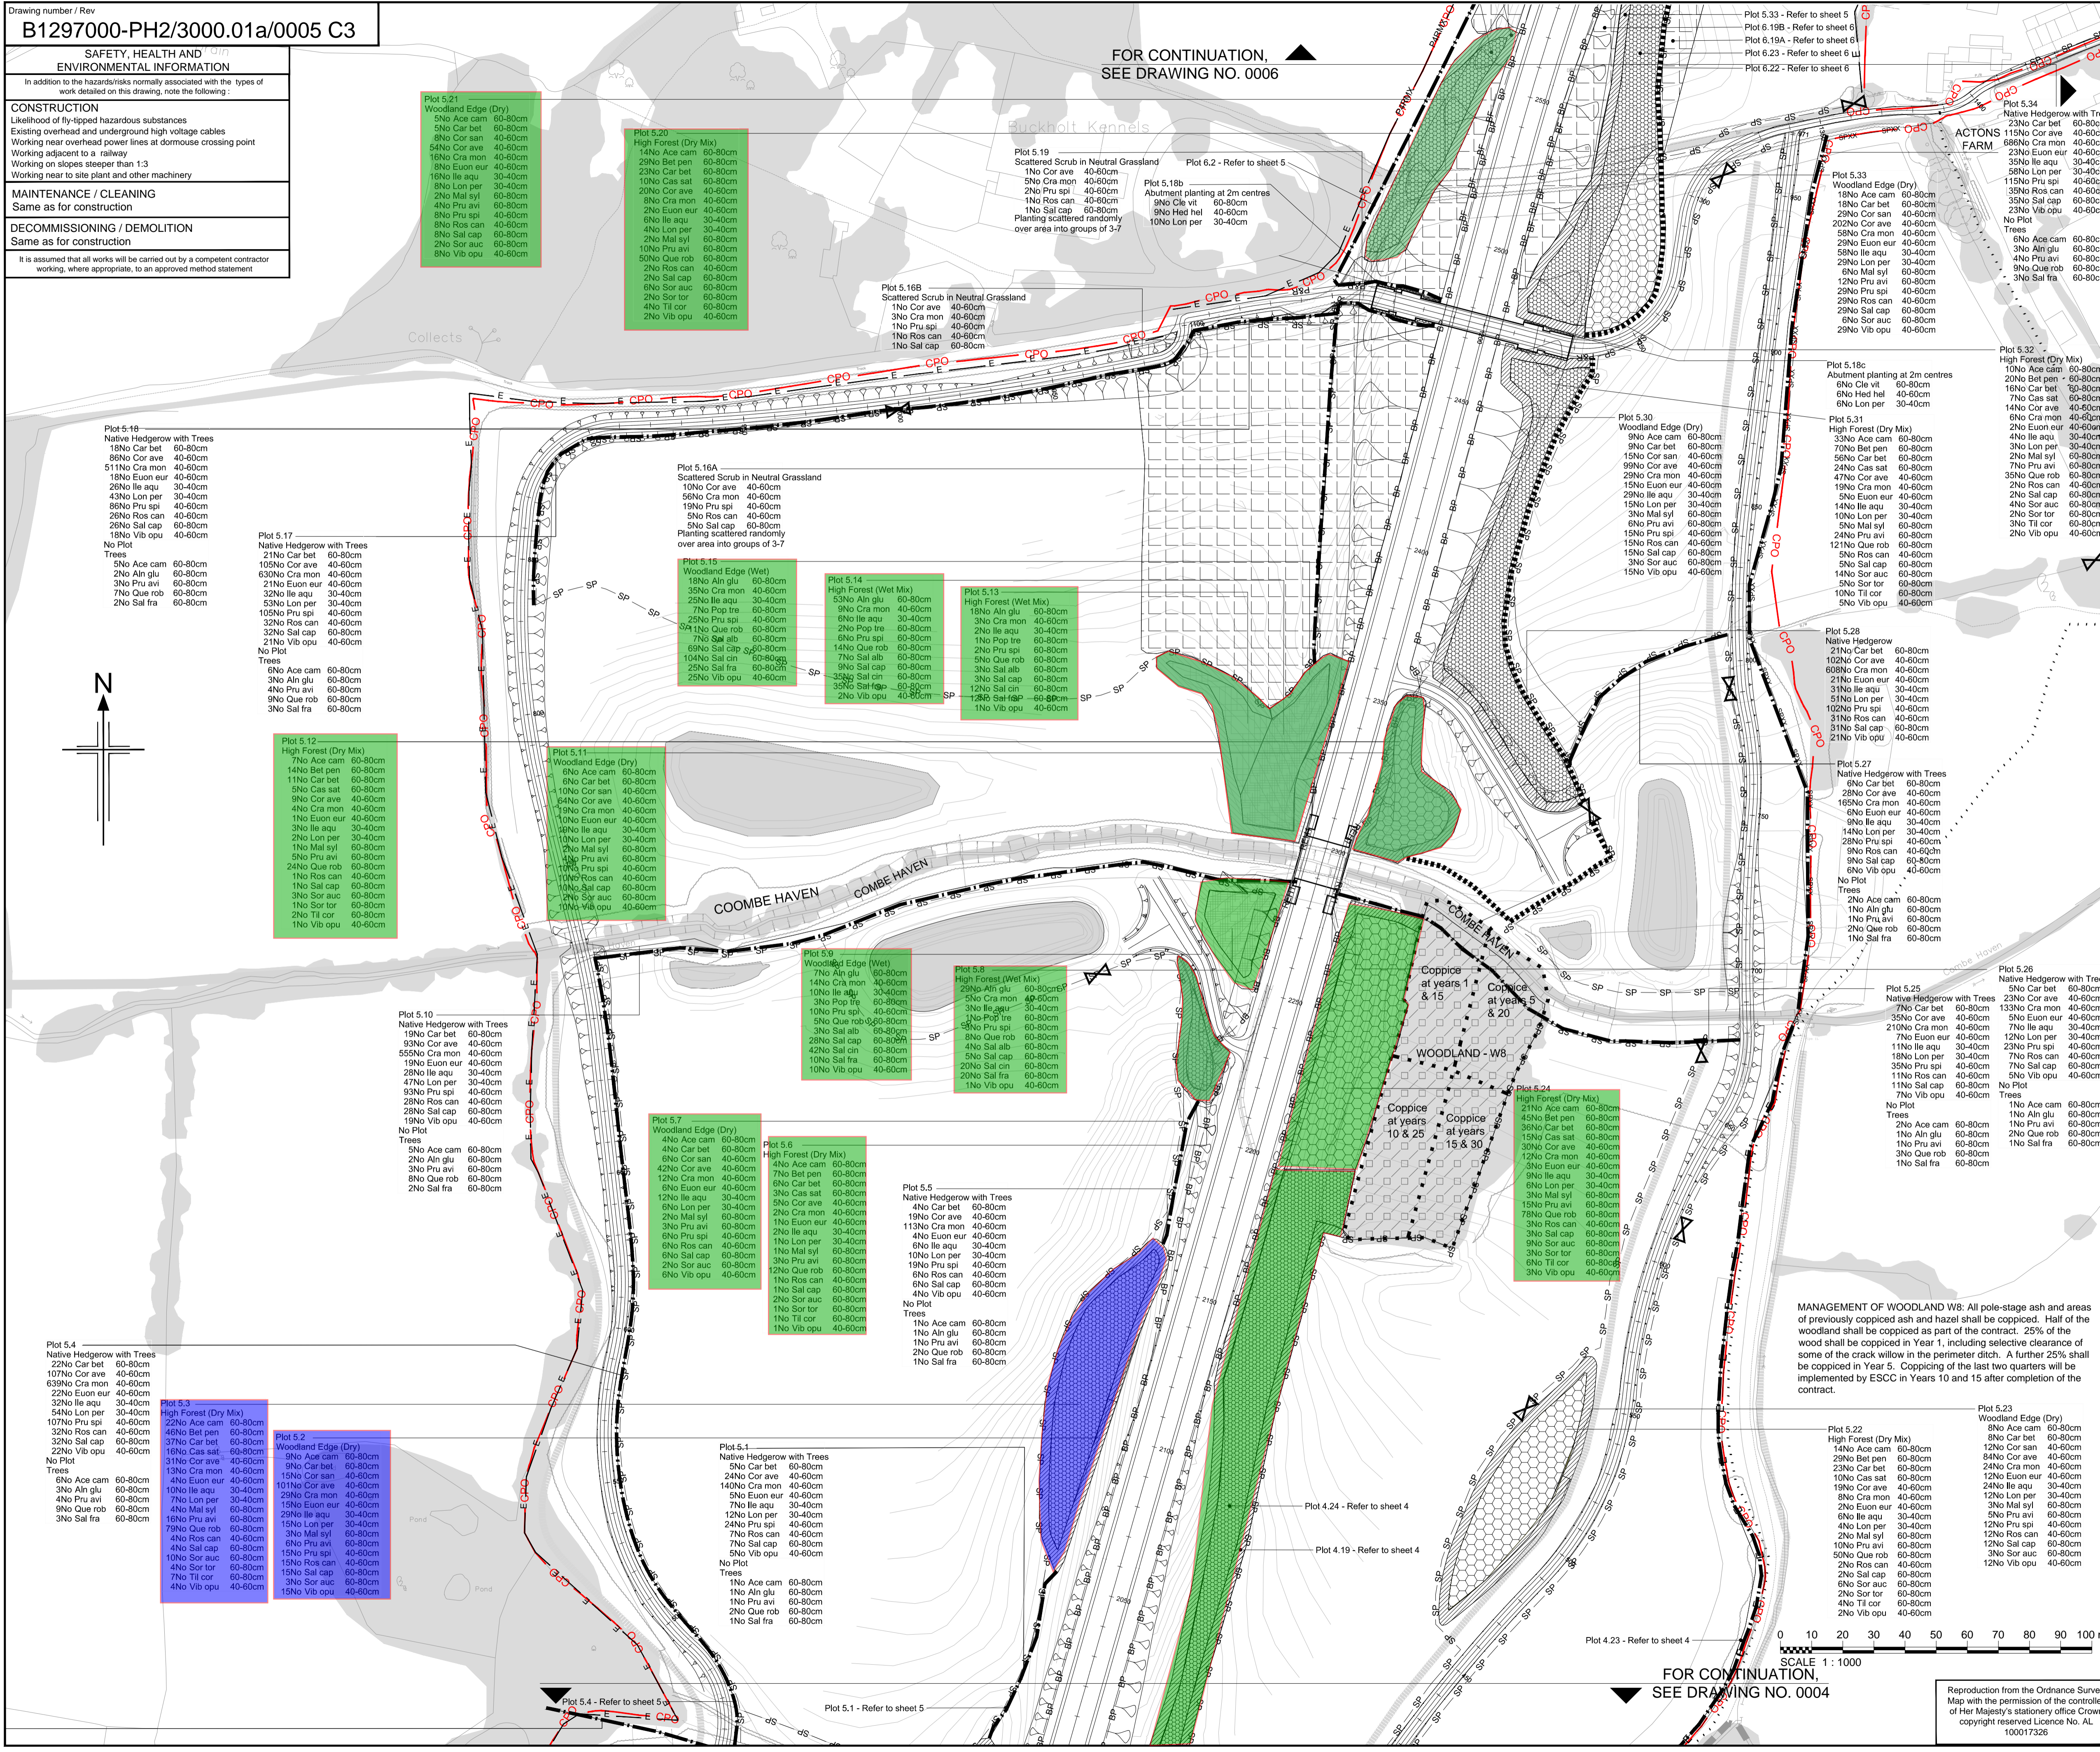

P:\BTL\UOB\B1297000 Bexhill Hastings\Phase 2 - Detailer Design\600 CAD\603 Drawings\3000 Landscape & Ecology

MANAGEMENT OF WOODLAND W8: All pole-stage ash and areas of previously coppiced ash and hazel shall be coppiced. Half of the woodland shall be coppiced as part of the contract. 25% of the wood shall be coppiced in Year 1, including selective clearance of some of the crack willow in the perimeter ditch. A further 25% shall be coppiced in Year 5. Coppicing of the last two quarters will be implemented by ESCC in Years 10 and 15 after completion of the contract.

SCALE 1:1000

FOR CONTINUATION, SEE DRAWING NO. 0004

Reproduction from the Ordnance Survey Map with the permission of Her Majesty's stationary office Crown copyright reserved Licence No. AL 100017326