


Sidley County Primary School
 SIDLEY COUNTY
 PRIMARY SCHOOL

County Primary School

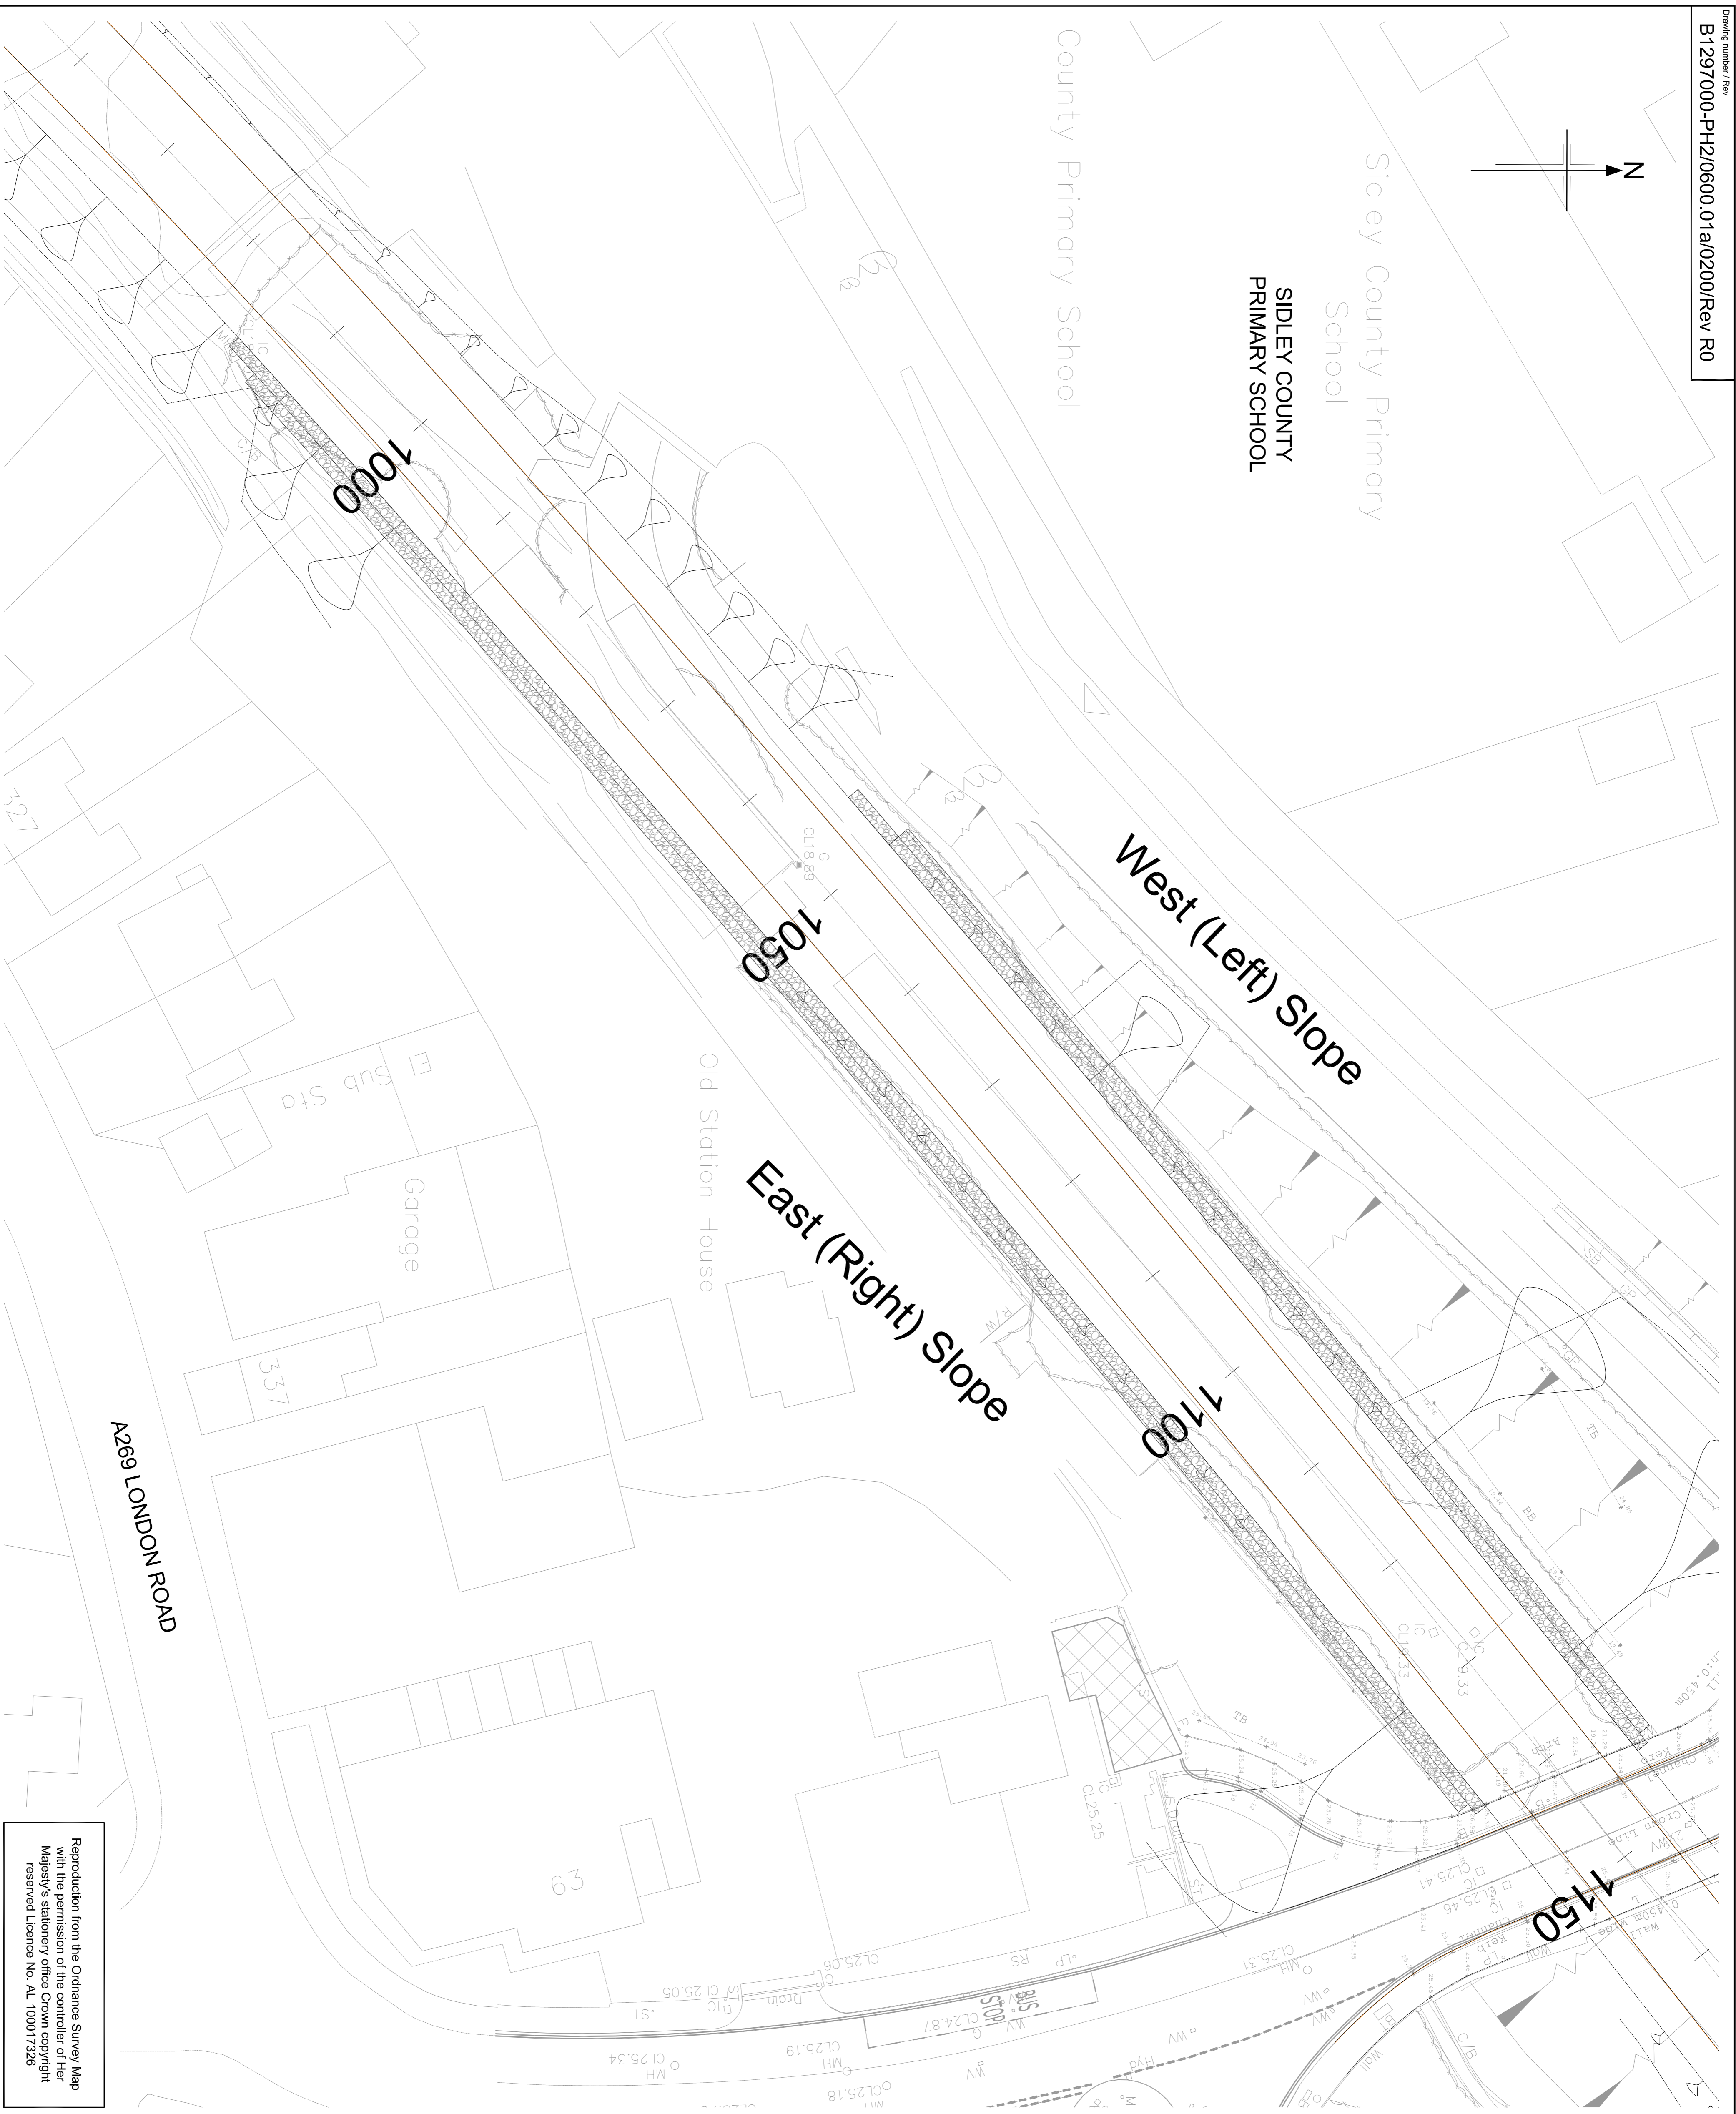

NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH RELEVANT SPECIFICATIONS AND DRAWING B129700-PH2/0600.01A/0026 AND 0027; TYPICAL SECTION CUTTING C2 AND C3 (CH 970 TO 1140).
2. DO NOT SCALE FROM DRAWINGS. USE GIVEN DIMENSIONS ONLY.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.
4. BACKFILL MATERIAL TO GABIONS TO BE CLASS 6N/6P (Ø=387) IN ACCORDANCE WITH THE 0600 SPECIFICATION APPENDICES.
5. GABION FILL SHALL BE SELECTED GRANULAR MATERIAL CLASS 6A IN ACCORDANCE WITH THE 0600 SPECIFICATION APPENDICES. THE FILL MATERIAL SHOULD BE OF HARD DURABLE STONE SUCH AS QUARRIED OR NATURALLY OCCURRING ROUNDED STONE.
6. FOUNDING LEVEL TO FOLLOW SLOPE OF THE ROAD. FORMATION LEVEL TO BE INSPECTED PRIOR TO COMMENCING GABION WALL CONSTRUCTION.
7. ANY SPOT SPOTS DETECTED PRIOR TO OR DURING EARTHWORKS OPERATIONS TO BE EXCAVATED AND BACKFILLED WITH ACCEPTABLE FILL MATERIALS OF SIMILAR CHARACTERISTICS TO THE SURROUNDING MATERIALS. CLASS 6A MATERIAL TO BE ADOPTED IF BACKFILL BELOW GROUNDWATER LEVEL. SOFT MATERIAL IS DEFINED AS HAVING AN UNDRANDED SHEAR STRENGTH LESS THAN 50kN/m² WHEN MEASURED BY HAND VANE ON SIMILAR.
8. TO ALLEVIATE THE EFFECTS OF FOUNDING, A POSITIVE DRAIN SYSTEM SHALL BE IMPLEMENTED CONNECTING THE GRANULAR FILL LAYER TO THE HIGHWAY DRAINAGE SYSTEM.
9. GABION WALL TO BE CONSTRUCTED WITH 6 DEGREE BATTER FROM VERGE (NOT SHOWN).
10. CONSTRUCTION OF GABION WALL IS MEASURED BACK FROM THE NEW WINGWALL FACE.
11. FOR THE EARTHWORK GENERAL ARRANGEMENT DRAWING REFER TO DRAWING B 129700-PH2/0600.01A/0015 (SHEET 3 OF 10).
12. FOR DETAILS OF DRAINAGE REFER TO SERIES 0500 DRAWINGS.
13. FOR DETAILS OF PAVEMENT REFER TO SERIES 0700 DRAWINGS.
14. FOR DETAILS OF UTILITIES REFER TO SERIES 2700 DRAWINGS.
15. FINISHED SLOPE TO BE VEGETATED. FOR DETAILS OF VEGETATION REFER TO SERIES 3000 DRAWINGS.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION	
In addition to the hazard/risk normally associated with the type of work detailed on this drawing, note the following:	
CONSTRUCTION	
EXTENSIVE EXCAVATION AND RECOMPACTION OF EXISTING SLOPE BETWEEN 1070 AND 1120 - REPLACED WITH COMPETENT GRANULAR FILL MATERIAL Ø = 38	
MAINTENANCE / CLEANINGS	
DECOMMISSIONING / DEMOLITION	
It is intended that all works will be carried out in a competent contractor working, where appropriate, to an approved method statement.	

Rev	Rev. Date	Rev. Description	Drawn	Checked	Rev'd	Apprv'd
R0	08-01-15	FOR INFORMATION	CN	SO	SO	JP

JACOBS
 Simpson House, 6 Cherry Orchard Road, Croydon, Surrey, CR9 8BE
 Tel: +44(0)2038 882 822 Fax: +44(0)208 881 2489
 www.jacobs.com

MOCHTER TRYLOR WOODROW
 400 WOODROW ROAD
 WOODROW, SOUTH AFRICA
 Employer

BEHILL TO HASTINGS LINK ROAD

Station House Gabion Wall Plan
 (Ch. 970m to 1140m)

Drawing title
ISSUED FOR REVIEW
 DO NOT SCALE

Scale
 1:250 @ A1
 Job No.
 B1297000-PH2
 Client No.
 Drawing number
B1297000-PH2/0600.01a/0200
 Rev
R0

Reproduction from the Ordnance Survey Map with the permission of the controller of Her Majesty's stationery office Crown copyright reserved Licence No. AL 100017326