

NOTES

1. Refer to drawing number B1297000-PH2/0200.01b/0001 for Key plan
2. For Reference see Bexhill to Hastings Link Road RPA Schedule
3. This drawing has been produced using information from topographical surveys which may not reflect the current situation exactly. Any inconsistencies are to be referred to the Designer for confirmation of removal.
4. All dimension in metres unless otherwise stated
5. Should it be necessary to carry out any work within 10m of the Root Protection Area, demarcated by post and wire fence, the work and any enhanced protection measures shall be agreed in writing with the ECOW prior to commencement of the operation.
6. In locations along the gateway and landscape areas where post and wire fencing is proposed, but minor works are to be carried out in close proximity, temporary fences panels shall also be erected in front of the hedges panels shall be taken up and relocated to the next section of gateway construction.


KEY

- Site extents and area of general site clearance
- Tree & root protection zone with reference T
- Group of Trees with reference G
- Hedges with reference H
- Woodland with reference W
- Root Protection Area
- Root Protection Fence - Post & Wire HCDH1 - See note 5
- Root Protection Fence in accordance with BS:5837
- Area of managed vegetation to be retained shall be protected by temporary 2m high steel tube and wire mesh fence in accordance with BS 5837. Areas of management vegetation to be retained that are remote from the construction works may be protected by timber post and three wire fence.
- Area where works have potential to impact on the root protection zone of vegetation to be retained. Detail Design of Greenway will be developed to minimise impact on the agreed with the project ECOW and Arboriculturalist.

Works within Root Protection Zone

Where works are required within the root protection area, methods of working are to be agreed with the Environmental COW and/or Arboriculturalist in accordance with the requirements of Appendix 3/000.

Notation
 W = Ret;
 0 = Unique sequence No
 6 = Offset (metres); x = offset distance from canopy; in metres
 T=RS = Tree offset (m) radii from single stem/trunk

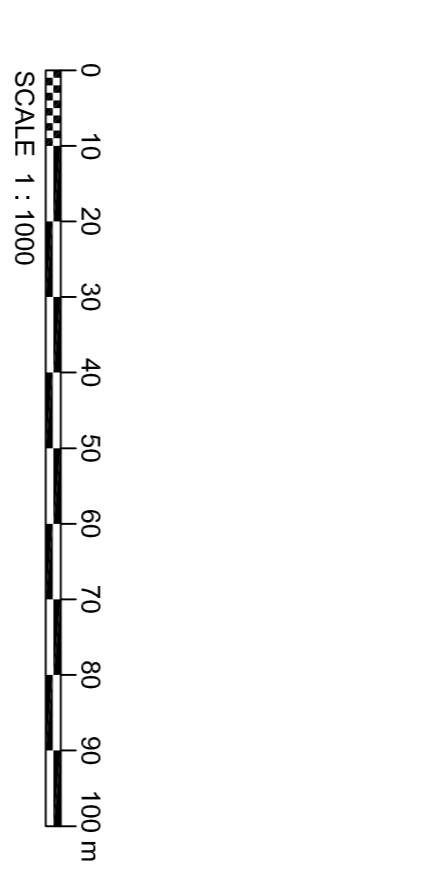

Client	HOCHTIEF			TRELORA			Simpson Hazard & Champ, Grand Road, Gosport, Surrey, GU8 6BE Tel: +44(0)2081 666 8212 Fax: +44(0)2081 2459 www.jacobs.com		
Employer	JACOBS								
Project	BEXHILL TO HASTINGS LINK ROAD								
Drawing title	TREE SURVEY - DECEMBER 2012 SHOWING ROOT PROTECTION ZONE SHEET 7 OF 14								
Drawing status	ISSUE FOR CONSTRUCTION								
Scale	1:1000 @ A1		DO NOT SCALE						
Jacobs No.	B1297000								
Client no.									
Drawing number	B1297000-PH2/0200.01b/0008								
Rev	C1								

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

In addition to the hazards normally associated with the types of work detailed on this drawing, note the following:

CONSTRUCTION

- High voltage power cables
- Areas of buried carcasses contain anthrax
- Areas prone to fly tipping, all known areas have been identified in Appendix 2.1 however the contractor should survey all areas prior to any works

MAINTENANCE / CLEANING

DECOMMISSIONING / DEMOLITION

It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement

Reproduction from the Ordnance Survey Map with the permission of the controller of Her Majesty's stationery office. Crown copyright reserved licence No. AL 11909173236

